

Special 630 with installation bracket set



Article

Item no.	Description
97725	Special 630 with installation bracket set Through beam photoelectric sensor with 8 m range, 2-wire, IP54, with installation brackets, with 10 m cable

Scope of delivery

- Light barrier transmitter
- Light barrier receiver
- 2 connecting cables, 10,000 mm
- 4 cable ties
- 2 installation brackets
- 2 holders for 1 mm sheet thickness
- Installation material

Features

Special 630

Features

- Function and contamination signaling by LED
- 2-wire technology: supply, signal and testing via only 2 polarity reversal protected and connectable wires
- Suitable for installation in the CH-51N and CH-101N pedestals
- Optical safety device to protect against personal injury and damage to property

Installation bracket set

Features

- Allows installing on the floor, wall or door frame

Use

Special 630

- For controls with connection for 2-wire light barriers

Installation bracket set

- For Special 630 light barrier

Technical data

Special 630

- Connection type: Conventional
- Interfaces: 2-wire
- Protection class: IP54
- Range [m]: 8
- Range (min.) [m]: 1
- Range (max.) [m]: 8
- Operating voltage [V]: 24 V-DC
- Width [mm]: 27
- Height [mm]: 64.5
- Depth [mm]: 19
- Packing width: 130
- Packing height: 35
- Packing depth/length: 200
- Packing weight: 0.292
- Freight forwarding articles: No
- GTIN: 4062434000403
- Customs tariff number: 85365080
- Country of origin 1000: Deutschland
- Garantie: 2 years


Installation bracket set

- Material: Steel (galvanized) Plastic
- Width [mm]: 38

- Height [mm]: 170
- Depth [mm]: 35
- Packing width: 110
- Packing height: 40
- Packing depth/length: 220
- Packing weight: 0.174
- Freight forwarding articles: No
- GTIN: 4062434006658
- Customs tariff number: 73269098
- Country of origin 1000: Deutschland
- Garantie: -

Technical drawings

Special 630

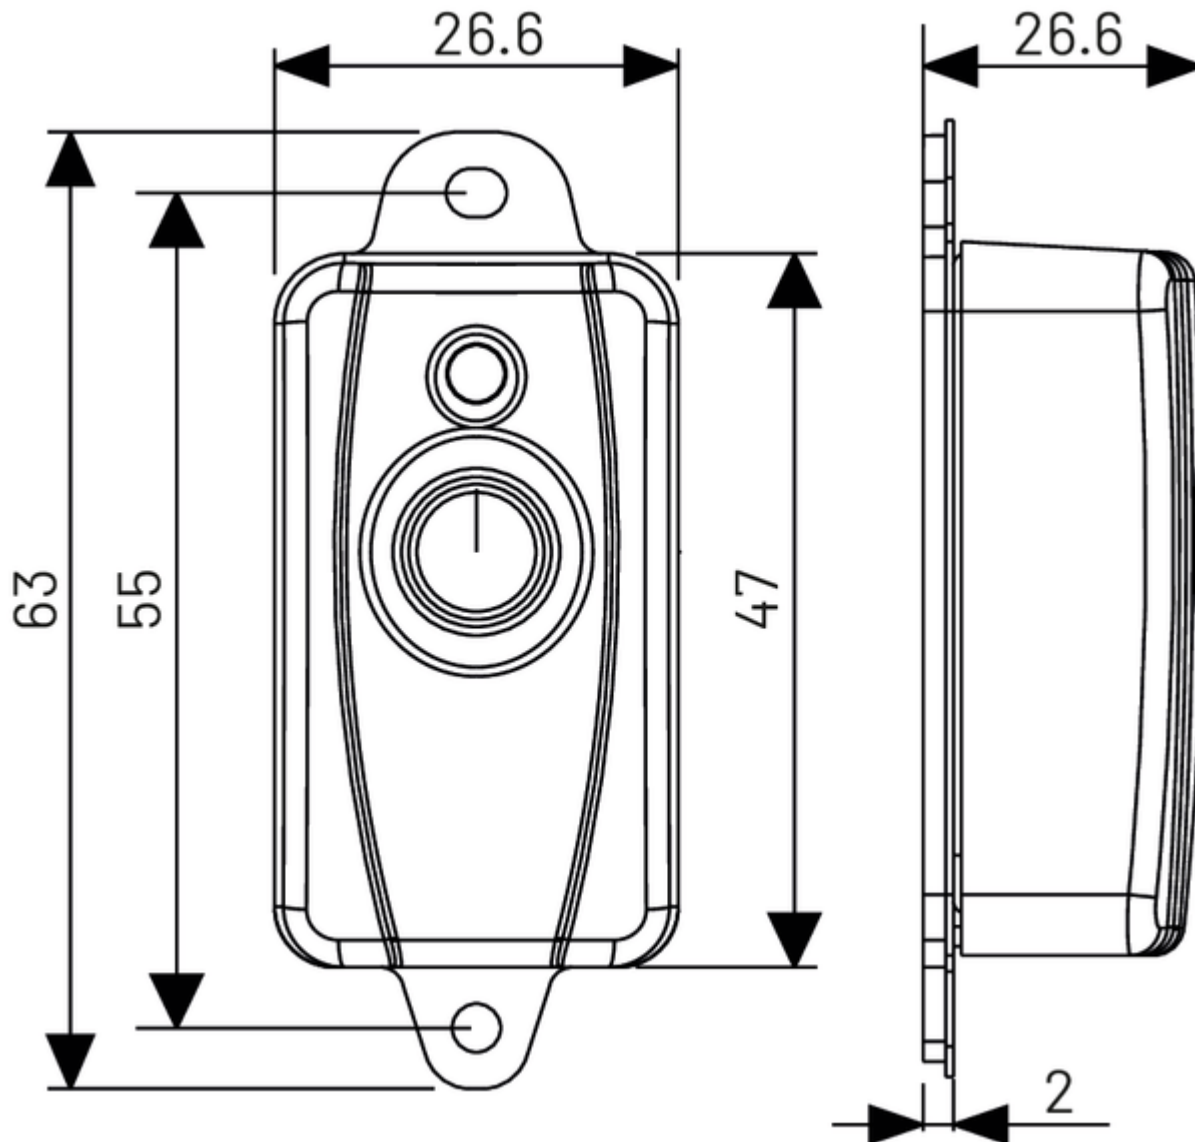

Installation bracket set

