


Reflex light barrier 24-240 V-AC/-DC

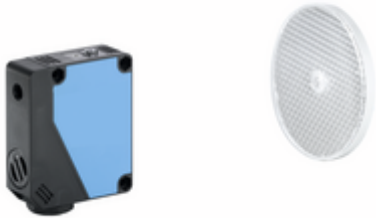

Article

Item no.	Description
98692	Reflex light barrier 24-240 V-AC/-DC with 10 m range, 24-240 V-AC/-DC, 4-wire, IP66, without cable, with installation bracket

Scope of delivery

- Light barrier transmitter/receiver
- Reflector 80 mm
- Installation bracket

Features

Features

- The reflector saves the laying of a cable from the control to the opposite side of the gate
- Optical safety device to protect against personal injury and damage to property

Use

- For controls with connection for 4-wire light barriers

Technical data

- Connection type: Conventional
- Outputs:
 - 1 potential-free relay contact (CO)
- Interfaces: 4-wire
- Protection class: IP66
- Temperature (min.)[°C]: -25
- Temperature (max.)[°C]: 55
- Temperature (min./max.)[°C]: -25/55
- Temperature (min.)[°F]: -13
- Temperature (max.)[°F]: 131
- Range [m]: 10
- Range (min.)[m]: 0
- Range (max.)[m]: 10
- Operating voltage [V]: 24-240 V-AC/-DC
- Power consumption [VA/W/kW]: 5 VA
- Contact load (max.):
 - 3 A (240 V-AC), 3 A (30 V-DC)
- Width [mm]: 63
- Height [mm]: 75
- Depth [mm]: 24
- Weight [kg]: 0.22
- Packing width: 85
- Packing height: 83
- Packing depth/length: 90
- Packing weight: 0.262
- Freight forwarding articles: No
- GTIN: 4062435001485
- Customs tariff number: 85365019
- Country of origin 1000: Volksrepublik China
- Garantie: -

Technical drawings

