


Ceiling pull switch

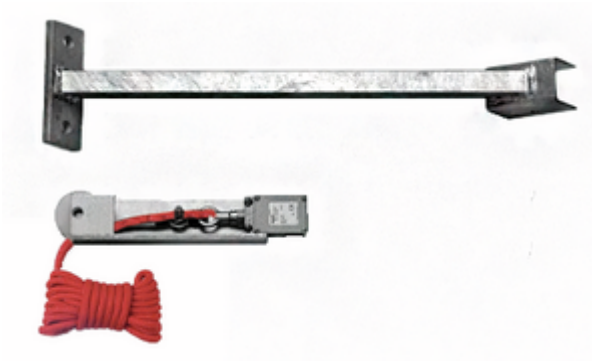

Article

Item no.	Description
564275	Ceiling pull switch with jump switch, 3.5 m pull rope, and 3 m Cantilever arm

Scope of delivery

- Ceiling pull switch with pull rope, 3,500 mm
- Cantilever arm, 3.000 mm
- Cantilever support
- Installation material

Features

Features

- Operation by pulling the pull rope
- Cantilever arm for wall or lintel installation at a distance from the gate

Use

- For all Marantec controls and third-party products

Technical data

- Connection type: Conventional
- Number of contacts: 2
- Contact type: 1 NO + 1 NC
- Switching system: Snap action
- Protection class: IP65
- Material: Aluminum die casting Steel (galvanized)
- Temperature (min.)[°C]: -20
- Temperature (max.)[°C]: 80
- Temperature (min./max.)[°C]: -20/80
- Contact load (max.):
400 V-AC/6 A
- Width [mm]: 40
- Height [mm]: 116
- Depth [mm]: 27
- Rope diameter (max.)[mm]: 15
- Packing width: 201
- Packing height: 135
- Packing depth/length: 2,998
- Packing weight: 13.393
- Freight forwarding articles: Yes
- GTIN: 4062434008300
- Customs tariff number: 84719000
- Country of origin 1000: Deutschland
- Garantie: -