
marantec
engineered for you

Comfort UN3224

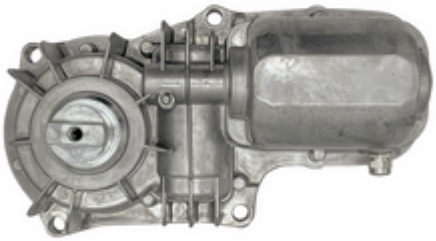

Article

Item no.	Description
178384	**Comfort UN3224** Underfloor operator for swing gates up to 3.5 m: 24 V-DC motor, 250 Nm, 90°, without encoder

Scope of delivery

- Motor unit without foundation box, pre-wired, 2x1.5 mm^2 1,500 mm

Features

Comfort UN3224

Features

- Current-dependent obstacle detection - no active closing edge protection necessary (only operators with encoder)
- Intergrated mechanical stops OPEN and CLOSED
- Robust metal gearbox
- Very quiet mechanism
- All mechanical parts protected against weather influences
- Lockable unlocking device
- Compatible with foundation boxes from other manufacturers (additional accessories required)

Technical data

Comfort UN3224

- Encoder: No
- Continuous sound pressure level (max.) [dB(A)]: 70
- Connection type: Conventional
- Protection class: IP67
- Width gate wing (max.) [m]: 3.5
- Weight of gate leaf (max.) [kg]: 600
- Gradient (max.) [%]: 0
- Temperature (min.) [°C]: -20
- Temperature (max.) [°C]: 55
- Temperature (min./max.) [°C]: -20/55
- Temperature (min.) [°F]: -4 °F
- Temperature (max.) [°F]: 131 °F
- Output torque [Nm]: 250
- Operating mode (duty cycle): S2 - 8 min
- Motor power [kW]: 0.12
- Opening angle (max.) [°]: 90
- Operating voltage [V]: 24 V-DC
- Operating voltage type: Direct current
- Motor voltage [V]: 24 V-DC
- Rated current [A]: 5
- Width [mm]: 346
- Height [mm]: 160
- Depth [mm]: 412
- Depth (min.) [mm]: 412
- Depth (max.) [mm]: 412
- Weight [kg]: 10.8
- Garantie: 5 years

Accessories

Item no.	Description
178397	**CF3** Cataphorized foundation box with galvanized cover and rotating arm with unlocking device
178398	**CI3** Stainless steel foundation box with lid and rotating arm with unlocking device
178400	**OP100** Chain arm for opening angle > 100°. Max. Leaf length 3 m
178401	**ADUN** Adapter for CAME foundation boxes

Technical drawings

Comfort UN3224

