Comfort 380



Article

Item no.	Description
183506	**Comfort 380** Set for garage doors up to 220 kg: 24 V-DC motor, 1,100 N, 18 cm/s

Scope of delivery

- Motor unit with integrated control
- Digital 921 Module receiver, 868 MHz bi.linked
- Digital 564 Mini hand transmitter 4-channel, 868 MHz bi.linked
- Digital 572 Micro hand transmitter 2-channel, 868 MHz bi.linked
- Universal installation set for up-and-over and sectional doors
- Power cable with Euro plug type C, 1,500 mm

Features

Comfort 380

Features

- DC motor: soft start and stop are gentle on the door, separately adjustable opening and closing speeds enable fast opening and standard-compliant closing
- Integrated control with illuminated LC display and easy programming
- Connections for push button, light barrier, wicket door contact, battery backup and expansion boards for retrofitting additional functions
- 2-sides and to the sides radiating LED illumination
- Fast and powerful

- Battery backup can be integrated in the housing

Features functions

- Power saving technology blueline
- Soft start/soft stop/soft run
- Electronic anti-deferral device
- Blocking protection
- Runtime limit
- Reversal of direction of rotation programmable
- Backjump (relief of the closing edge)
- Automatic feed function (can only be used in conjunction with a light barrier)
- Intermediate position OPEN and CLOSED separately programmable
- Gate travel speed OPEN and CLOSE separately programmable
- Soft run position OPEN and CLOSE separately programmable
- Soft run speed OPEN and CLOSE separately programmable
- Frame function (blanking of frame light barriers)
- Programmable impulse input and output
- Cycle counter
- Maintenance interval programmable
- Error signaling with error memory
- Multi-level reset function (control, safety, radio, etc.)

Features end position adjustment

- Electronic limit stop

Features operation

- Marantec EOS programming
- Programming and status message via LC display
- Programming and diagnostics possible via optional external handheld programmer
- Programming and diagnostics possible via maveo pro by smartphone app

Features structure and connection

- Connection (conventional) for push button, light barrier and holding circuit
- Pluggable radio receiver
- Connection (MS-Bus) for expansion boards (boards can be integrated)
- Connection (MS bus) for handheld programmer and expansion modules
- Connection for battery backup
- Output 24 V-DC, max. 50 mA

Digital 921

Features

- IMPULSE function
- Generous memory for up to 200 keys
- Directly pluggable into the control system
- Compact size

Digital 564

Features

- 4 function keys for free assignment
- Signaling by red LED
- Eyelet for attachment to keychain or lanyard
- High security through 128-bit AES-encrypted radio transmission and constantly changing radio code (rolling code method)

Digital 572

Features

- 2 function keys for free assignment
- Signaling by red LED
- Eyelet for attachment to keychain or lanyard
- High security through 128-bit AES-encrypted radio transmission and constantly changing radio code (rolling code method)

Use

Comfort 380

	Comfort 380
Width overhead doors (max.) [m]	6
Width of tipping and canopy gates (max.) [m]	6
Height of tilt and canopy gates (max.) [m]	2.25
Width of single-wall sectional doors (max.) [m]	6
Width of double-walled sectional doors (max.) [m]	6
Gate weight (max.) [kg]	220

Digital 921

- For Comfort 260 (accu/speed), 270 (speed), 280, 360, 370, 380 and 390 (plus) from control box R10. For Control x.52, CS 265 and VTA

Digital 564

- For all Marantec controls and third-party products (in conjunction with corresponding bi.linked receiver)

Digital 572

- For all Marantec controls and third-party products (in conjunction with corresponding bi.linked receiver)

Technical data

Comfort 380

- Overload protection: Shutdown via current consumption
- Continuous sound pressure level (max.) [dB(A)]: 70
- Connection type: Pluggable
- Illuminant: 2x 10 LED module
- Protection class: IP20
- Protection class: II
- Width overhead doors (max.) [m]: 6
- Width of tipping and canopy gates (max.) [m]: 6
- Width of single-wall sectional doors (max.) [m]: 6
- Width of double-walled sectional doors (max.) [m]: 6
- Height of tilt and canopy gates (max.) [m]: 2.25
- Gate weight (max.) [kg]: 220
- Temperature (min.) [°C]: -20
- Temperature (max.) [°C]: 60
- Temperature (min./max.) [°C]: -20/60
- Temperature (min.) [°F]: -4 °F
- Temperature (max.) [°F]: 140 °F
- Humidity (max., non-condensing) [%]: 93
- Push and pull force (max.) [N]: 1,100
- Nominal push and pull force (max.) [N]: 330
- Cycles per hour (max.)*: 6
- Cycles per day (max.): 60
- Running speed (max.) [cm/s]: 18
- Operating voltage [V]: 230 V/1~
- Operating voltage type: Alternating current
- Nominal frequency [Hz]: 50/60
- Motor voltage [V]: 24 V-DC
- Control voltage [V]: 24 V-DC
- Rated current [A]: 1.1
- Power consumption [VA/W/kW]: 0.25 kW
- Power consumption in standby [VA/W/kW]: 0.1 W
- Time to readiness [min]: 1–5
- Width [mm]: 360
- Height [mm]: 135
- Depth [mm]: 335
- Weight [kg]: 4.9
- Garantie: 5 years

Digital 921

- Channels: 256
- Number of memory locations: 200
- Antenna: Wire antenna

- Radio frequency: 868 MHz
- Radio technology: bi.linked
- Radio coding: Marantec
- Communication direction: Bidirectional
- Protection class: IP00
- Temperature (min.) [°C]: -20
- Temperature (max.) [°C]: 60
- Temperature (min./max.) [°C]: -20/60
- Temperature (min.) [°F]: -4
- Temperature (max.) [°F]: 140
- Operating voltage [V]: 5 V-DC
- Rated current [A]: 0.002
- Width [mm]: 23
- Height [mm]: 7.7
- Depth [mm]: 48.4
- Packing width: 51
- Packing height: 13
- Packing depth/length: 59
- Packing weight: 0.009
- Freight forwarding articles: No
- GTIN: 4062434001097
- Customs tariff number: 85269200
- Country of origin 1000: Deutschland
- Garantie: 2 years

Digital 564

- Housing type: Mini
- Number of freely programmable keys: 4
- Channels: 4
- Antenna: Integrated
- Radio frequency: 868 MHz
- Radio technology: bi.linked
- Radio coding: Marantec
- Communication direction: Unidirectional
- Color: RAL 9005 RAL 9016
- Temperature (min.) [°C]: -20
- Temperature (max.) [°C]: 60
- Temperature (min./max.) [°C]: -20/60
- Temperature (min.) [°F]: -4
- Temperature (max.) [°F]: 140
- battery type: CR2032, 3 V
- Battery count: 1
- Width [mm]: 39
- Height [mm]: 92

- Depth [mm]: 12
- Weight [kg]: 0.04
- Packing width: 56
- Packing height: 52
- Packing depth/length: 101
- Packing weight: 0.114
- Freight forwarding articles: No
- GTIN: 4062434000892
- Customs tariff number: 85269200
- Country of origin 1000: Deutschland
- Garantie: 2 years

Digital 572

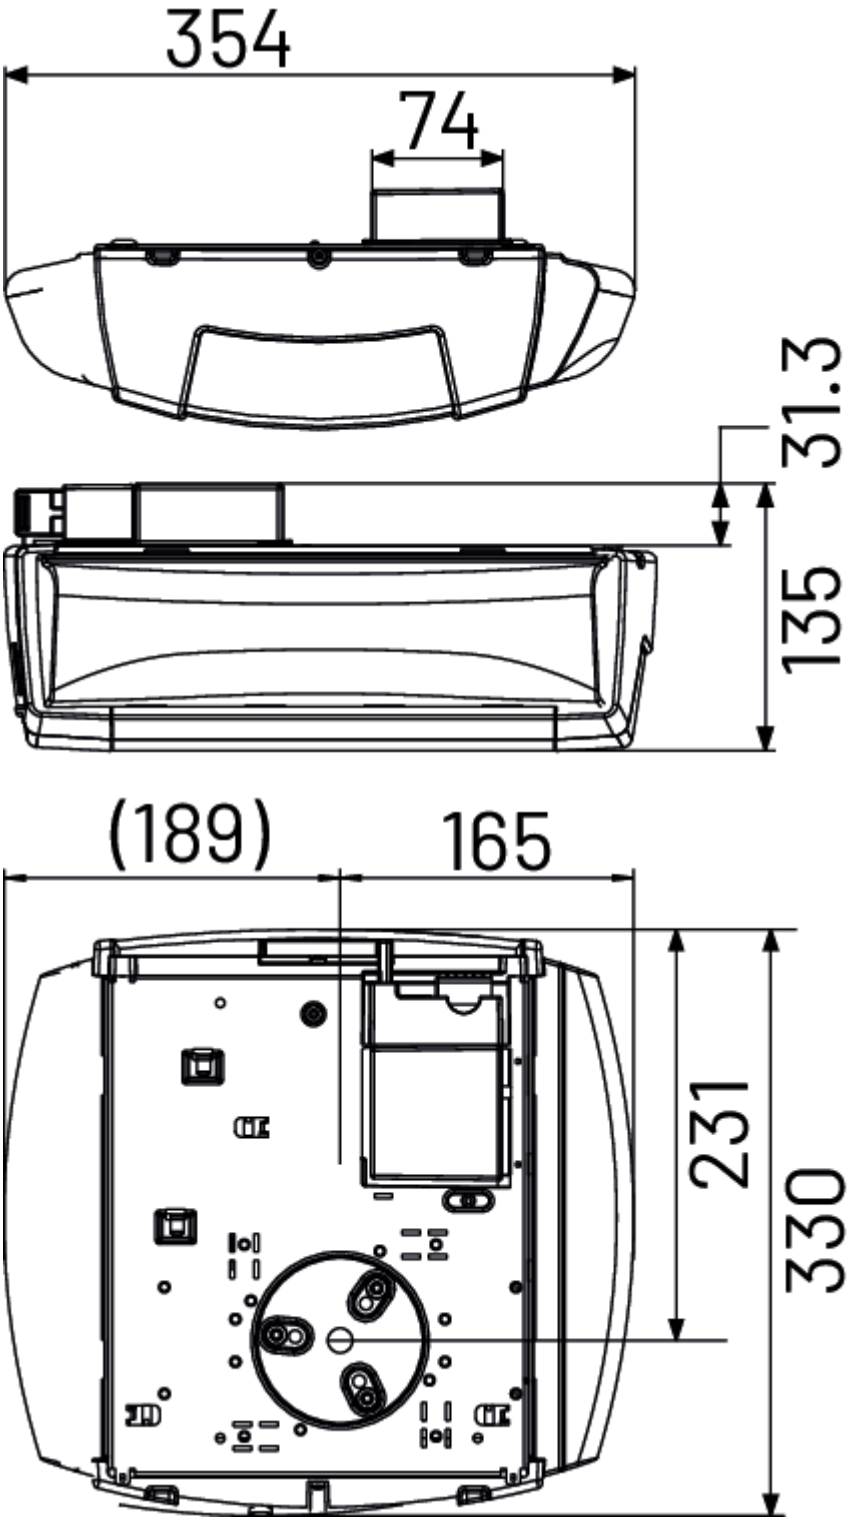
- Housing type: Micro
- Number of freely programmable keys: 2
- Channels: 2
- Antenna: Integrated
- Radio frequency: 868 MHz
- Radio technology: bi.linked
- Radio coding: Marantec
- Communication direction: Unidirectional
- Color: RAL 9005 RAL 9016
- Temperature (min.) [°C]: -20
- Temperature (max.) [°C]: 60
- Temperature (min./max.) [°C]: -20/60
- Temperature (min.) [°F]: -4
- Temperature (max.) [°F]: 140
- battery type: CR2032, 3 V
- Battery count: 1
- Width [mm]: 39
- Height [mm]: 60
- Depth [mm]: 12
- Weight [kg]: 0.03
- Packing width: 56
- Packing height: 52
- Packing depth/length: 76
- Packing weight: 0.055
- Freight forwarding articles: No
- GTIN: 4062434000922
- Customs tariff number: 85269200
- Country of origin 1000: Deutschland
- Garantie: 2 years

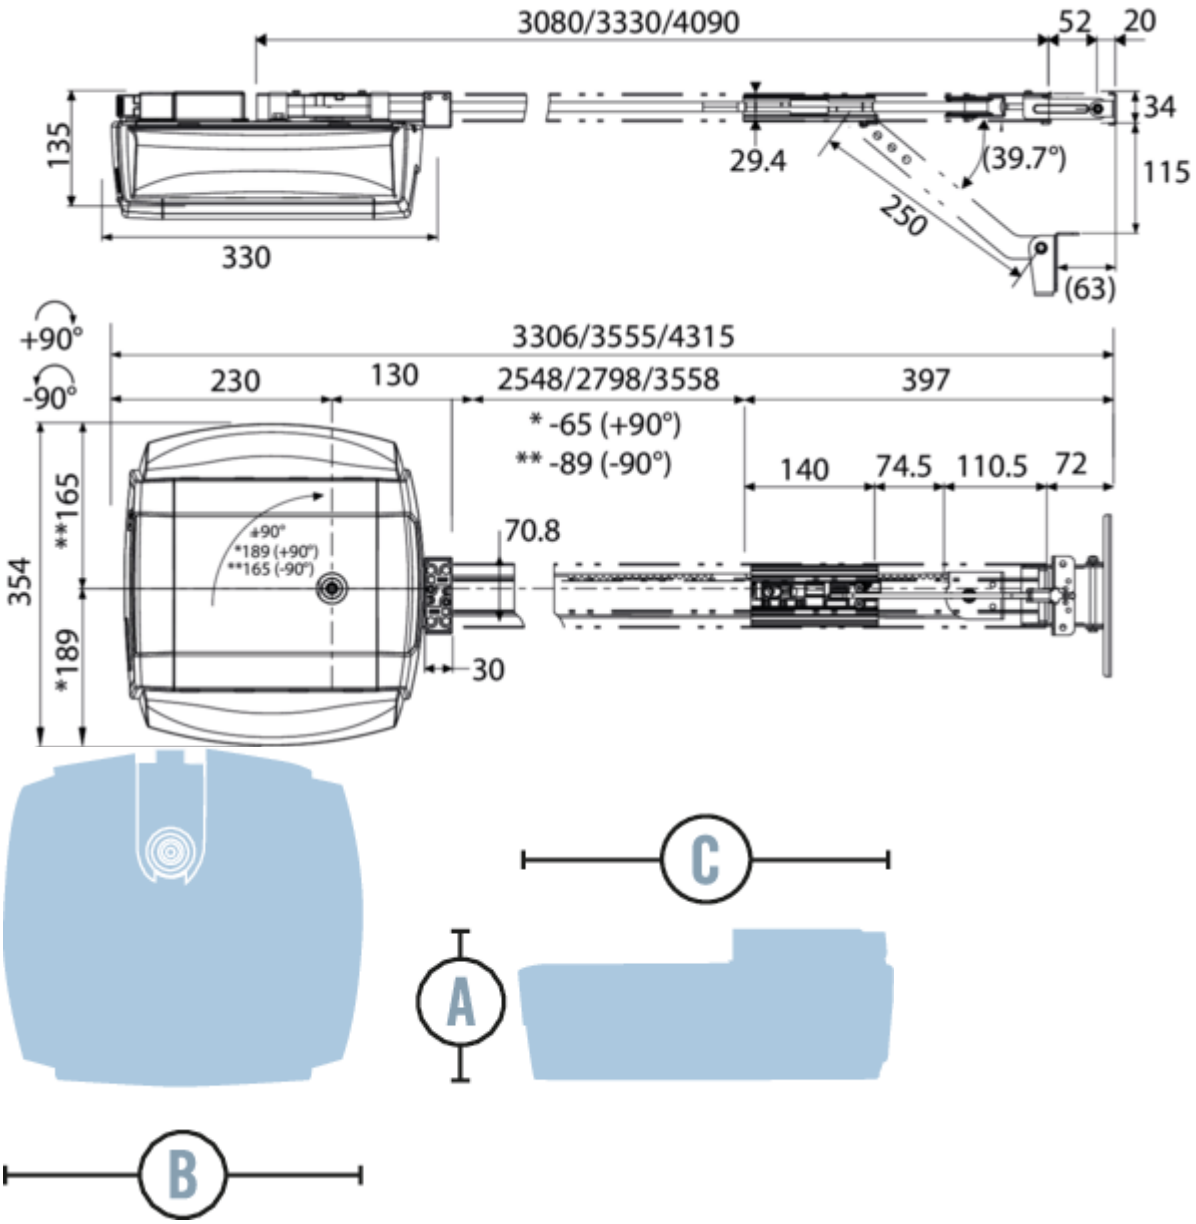
Accessories

Item no.	Description
189602	**maveo connect stick** Plug & Play WiFi adapter for garage door, swing door and sliding door openers
177208	**SZ 11** Opener rail for garage door openers, 3.08 m profile length, 0.8 mm thickness, toothed belt, 2-piece
177210	**SZ 12** Opener rail for garage door openers, 3.33 m profile length, 0.8 mm thickness, toothed belt, 2-piece
177212	**SZ 13** Opener rail for garage door openers, 4.09 m profile length, 0.8 mm thickness, toothed belt, 2-piece
101117	**Digital 663** 3-channel mini hand transmitter with status request, bidirectional, 868 MHz bi.linked
101115	**Digital 572** 2-channel micro hand transmitter, unidirectional, 868 MHz bi.linked
101106	**Digital 564** 4-channel mini hand transmitter, unidirectional, 868 MHz bi.linked
101149	**Digital 525** 4-channel radio code push button with 3 permanent PINs, one temporary PIN and one light button, unidirectional, 868 MHz bi.linked
161336	**Digital 520** 2-channel radio indoor push button, unidirectional, 868 MHz bi.linked

Technical drawings

Comfort 380


354
74
31.3
135
(189)
165
231
330


3080/3330/4090
52
20
34
115
135
330
29.4
(39.7°)
250
(63)
+90°
-90°
3306/3555/4315
230
130
2548/2798/3558
397
* -65 (+90°)
** -89 (-90°)
140
74.5
110.5
72
70.8
354
**165
*189
30
+90°
*189 (+90°)
**165 (-90°)
C
A
B